


BIAXIAL POLYPROPYLENE OR
POLYESTER GEOGRID

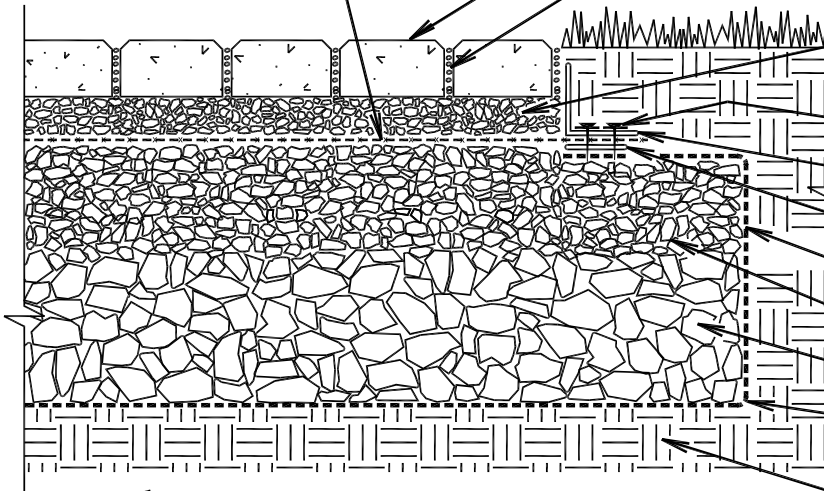

CONCRETE PAVERS MIN. 2 3/8 IN. (60 MM) THICK
FOR PEDESTRIAN TRAFFIC

TYP. NO. 8, 89, OR 9 AGGREGATE IN OPENINGS

BEDDING COURSE 2 IN. (50 mm) THICK
(TYP. NO. 8 AGGREGATE)

SELF TAPPING SCREW AND WASHER

ALUMINUM EDGE RESTRAINT

ALUMINIUM CAPTURE PLATE 3"X10"


GEOTEXTILE ON TOP AND SIDES OF SUBBASE

MIN. 4 IN. (100 MM) THICK NO. 57 STONE OPEN-GRADED BASE



MIN. 6 IN. (150 MM) THICK NO. 2 STONE SUBBASE

OPTIONAL DRAINAGE GEOTEXTILE ON
SUBGRADE PER DESIGN ENGINEER


SOIL SUBGRADE

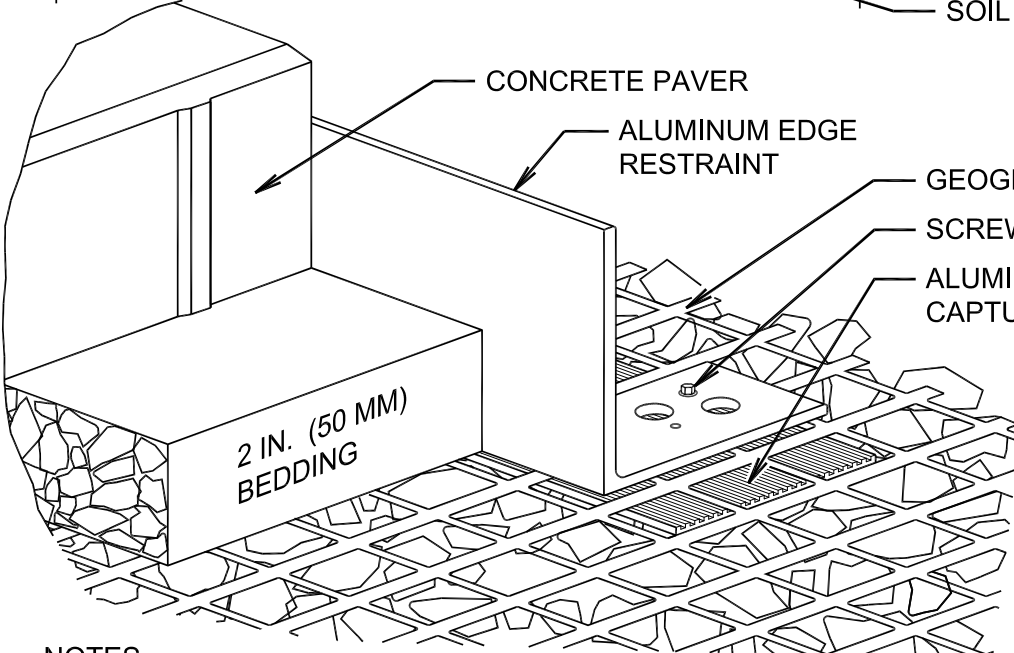

DETAILS SHOWN BELOW ARE FOR
ILLUSTRATIVE PURPOSES ONLY.

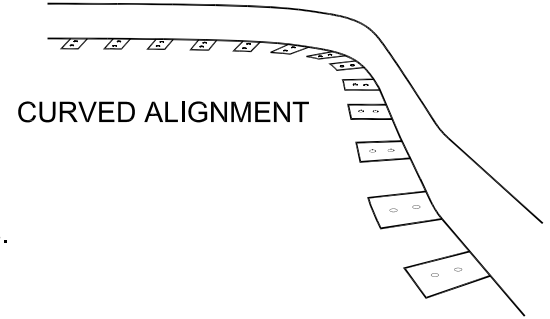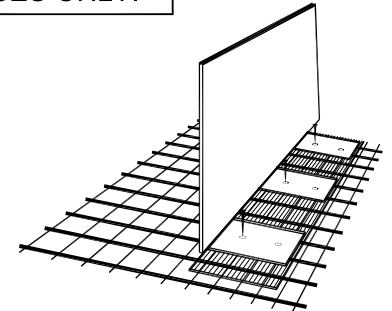

- NOTES:
1. USE 3 1/8 IN. (80 MM) THICK PAVERS IN RESIDENTIAL DRIVEWAY APPLICATIONS.
 2. NO. 2 STONE SUBBASE THICKNESS VARIES WITH DESIGN.
CONSULT ICPI PERMEABLE INTERLOCKING CONCRETE PAVEMENT MANUAL.
 3. SELECT GEOTEXTILE PER AASHTO M 288.



**PERMEABLE INTERLOCKING CONCRETE PAVEMENT
ALUMINUM EDGE RESTRAINT WITH GEOGRID**

DRAWING NO.	ICPI-88
SCALE	NO SCALE